

### PLUMBERS INSTALLATION INSTRUCTIONS

#### Important Information

- \* **Not suitable for gravity feed systems.**
- \* **Mixer is fitted with a flow regulated aerator insert. This low flow rate may not be suitable for connection to some Instantaneous Gas Water Heaters, some Tempering Valves, some Solar Water Heaters & some Thermostatic Mixing Valves.**
- Check with the manufacturers of these products.**
- \* **All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water. Note: Aerator insert housing must be retightened to prevent removal by hand.**

#### Installation


- 1) From fixing pack, screw stud (18) into underside of mixer body (8) and fit sealing washer (15) into base of mixer (8) as shown..
- 2) **Flexible Tail Mixer Connections:** Apply suitable lubricant to 'O' rings (14). Fit flexible tail (20) (with red indication) into hole marked 'H' in underside of mixer body (8). Hand tighten the tail, ensuring the 'O' rings (14) have fully entered the sealing bore to provide a watertight joint. Fit other flexible tail (with blue indication) into remaining hole in a similar manner.
- 3) Insert the inlet connection end (21) of each flexible tail (20) through the hole in the deck. Align cutouts in sealing washer (15) (Fig.2) with flexible tails. Place mixer over deck hole, fit gasket (16) and fixing plate (17) over stud (18) then screw on fixing nut (19). Position mixer as required then tighten fixing nut (19) using a suitable spanner.
- 4) If swivel spout (10) is required to be fitted, first place slipper (13) in spigot groove (9). Ensure 'O' rings are well lubricated then slide the swivel spout (10) over spigot, taking care that the hole in the outlet aligns with the slipper hole. Fit screw (11) and tighten with 2mm allen key (12) provided.
- 5) **Flexible Tail Inlet Connections:** Connect the flexible tails (20) to the hot and cold isolating stop taps, hand tighten the connecting nut (21) until rubber cone contacts the sealing face of the connection end, then tighten a further one turn to provide a watertight joint.  
**Important:** Flexible tails must not be kinked, twisted or in tension when installed. (Minimum Bend Radius:- 50mm)  
 Do not install flexible tails where subject to ultra violet light.

#### Replacing Cartridge

- 1) Turn off hot and cold water supplies at isolating stop taps.
- 2) Carefully unscrew handle lever (4). Using 2.5mm allen key (3) loosen grub screw (2) and remove handle (1). Remove cap (5) taking care not to damage the decorative finish. Unscrew nut (6) then lift out old cartridge (7).
- 3) Ensure inside face of mixer body (8) is clean. Check that seal is in position in base of new cartridge (7). Fit new cartridge (7) into mixer body (8), taking care that two lugs on base of cartridge (7) fit into mating holes in mixer body (8).
- 4) Screw on nut (6). **Important:-** Nut (6) should be tightened to a torque of 10 Nm.
- 5) Replace cap (5), tightening by hand. Fit handle (1) taking care that it is pushed fully down. Ensure that 'O' ring is in position in handle (1) as shown then tighten grub screw (2). Replace handle lever (4) taking care not to damage the decorative finish.
- 6) Turn on isolating stop taps and check operation.

#### Replacing Aerator Insert

- 1) Carefully remove aerator housing (22) from spout (10), taking care not to damage the decorative finish.  
**Hint:** Wearing a dry rubber glove will assist when removing and tightening the housing.
- 2) Remove 'O' ring (24) & aerator insert (23) from aerator housing. Check that aerator housing is clean. Deposits of lime can be removed by washing in a vinegar solution.
- 3) Fit new aerator insert (23) into aerator housing (22) followed by 'O' ring (24) then screw assembly onto spout (10) and tighten securely (to prevent removal by hand).

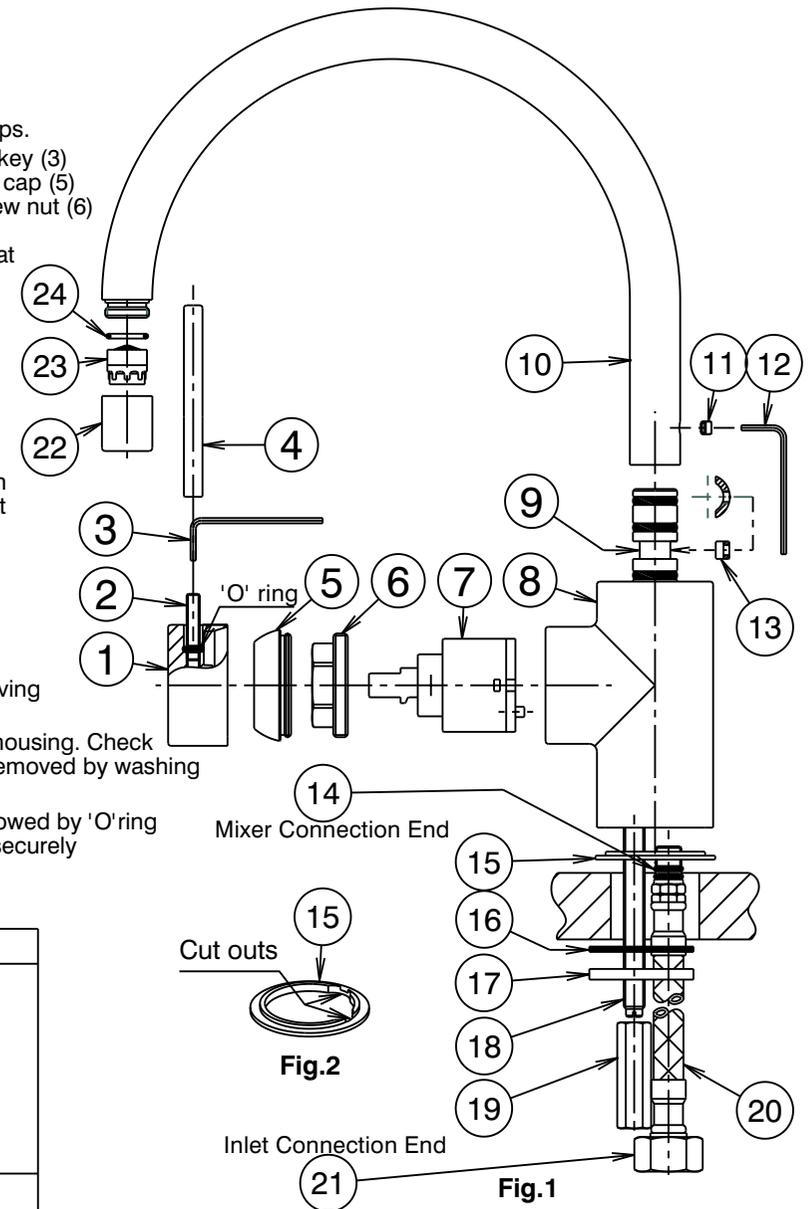

<b>IMPORTANT</b>	
<b><u>Pressure &amp; Temperature Requirements.</u></b>	
•	Hot and cold water inlet pressures should be equal.
•	Static inlet pressure range : 150-1000 kPa
	New Regulation:- 500 kPa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
•	Maximum hot water temperature : 70°C. (In accordance with AS 3499)
<b><u>Deck Requirements</u></b>	
•	Deck thickness : 45mm maximum
•	Tap body hole (in deck) : Ø34-36mm