


# **Cosmo Care Pan**

**Vitreous China Pan for accessible application installations complying to the WC pan requirements to AS 1428.1-2009**

A contemporary designed 4.5 litre full flush **Cosmo Care Pan** with concealed trap is designed to provide a raised seat height of between 460-480mm for accessible applications . The versatility of the **Cosmo Care Pan** makes it ideal for use by both the ambulant people with disabilities and wheel-chair users including wheeled commode chairs.

**Important: Further reference must be made to AS 1428.1-2009 with current amendments to determine circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standards.**

**Pan:** **Cosmo Care Pan** with concealed trap, 4.5 litre full flush wash-down type.

**Traps:** S or P-trap unvented only. Slope of P-trap 95°.

**Inlet:** 50mm back inlet.

**Cisterns:** The **Cosmo Care Pan** with concealed trap is recommended for use with the **Sovereign Cistern** (wall fix version) and Caroma Care Push Button option.

**Position of the Pan:** For wheel chair access the installed pan must be 800 ± 10mm from the front of the pan to the finished wall and provide a seat height of 460 to 480mm. The projection requirements for people with ambulant disabilities is 610 to 660mm.

**Position of the Cistern:** The underside of the cistern must be 600mm minimum from the finished floor. The push button height must be no greater than 1100mm from the finished floor.

**Seats:** Recommended Caroma seats – **Pressalit, Avalon Commercial, Caravelle Standard** (sold separately).


**Installation:** Refer to *Important Information for Plumbers* section.

**Colours:** White only.




Caroma Care Push Button Option

## Seat Height





# Cosmo Care Pan (continued)

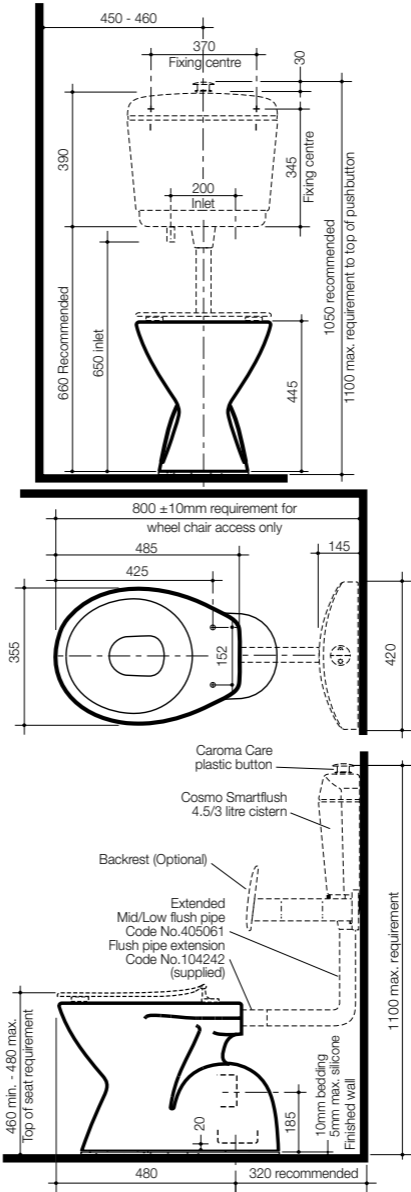

**Note: The projection requirements detail on this illustration are for wheel chair access only. The projection requirements for people with ambulant disabilities is 610 to 660mm.**

For height dimensions to underside of pan, make allowance for mortar bedding.