


**Wall-faced pan with inwall/induct/undercounter or in ceiling concealed cistern.**



SfB Code \_\_\_\_\_  
(74.1)



The Seido Icon II toilet suite includes a modern wall faced pan with a distinctive shape and smooth sides for easy cleaning with a 620mm projection from the wall, suitable for domestic and commercial applications. Concealed cistern and plumbing fittings provide space saving with performance matched components to maximise flushing efficiency.

### Installation guidelines

**Pan:** Floor-mounted: For direct fixing to concrete, bedding mix is recommended, using a sand and cement mixture of 3:1 to a depth of 60mm. For other surfaces, the pan should be bonded to the floor with acetic-cured silicone sealant and fixed with D80 fixing brackets.



**Outlet connection:** PVC, copper or cast iron, or Uniconnector supplied.

**Cistern:** Mounted into position with two mounting brackets which are secured with screws to the studwork or induct brickwork.

Cistern brackets, standard or short flushpipe supplied.

### Seat

Supplied with Seido soft-close seat.

### Colours available

White.

### Product codes

Induct/inceiling/inwall/undercounter suite (715100).



**Wall-faced pan with inwall/ induct/undercounter or inceiling concealed cistern.**

### Features

- ◆ features rough-in and fit-out kits.
- ◆ rough-in kit contains the cistern, flush pipe and associated components.
- ◆ fit-out kit contains pan with fixing kit and seat.
- ◆ buttons and other components sold separately.
- ◆ 4 star WELS water efficiency rating.

### Cistern mounting

Inwall, induct, undercounter or inceiling applications. A Remote Mounting Box Kit is required for induct, inceiling or remote installations. (not supplied)

### Flushing capacity

4.5/3 litre Smartflush.

### Cisterns inlet

Concealed.

### Inlet valve


Fitted with quiet, fast-filling inlet valve.

### Outlet valve

Pneumatic dual-flush outlet valve.


### Trap outlet

Concealed universal trap.

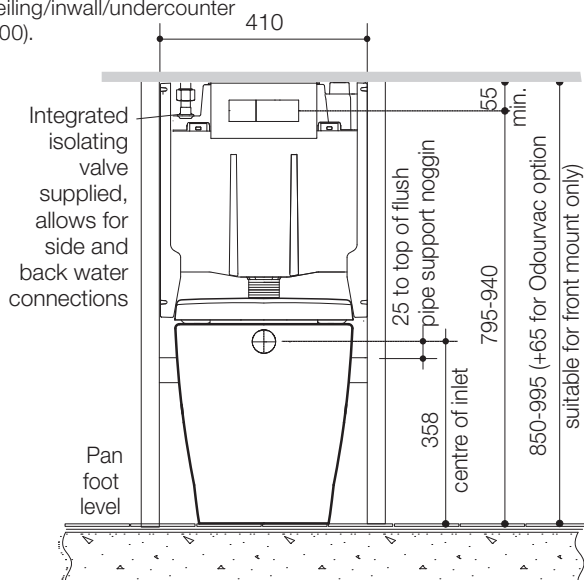

Accurate positioning of the waste pipe relative to studwork is essential.



90mm min. front button installation  
100mm min. top button installation

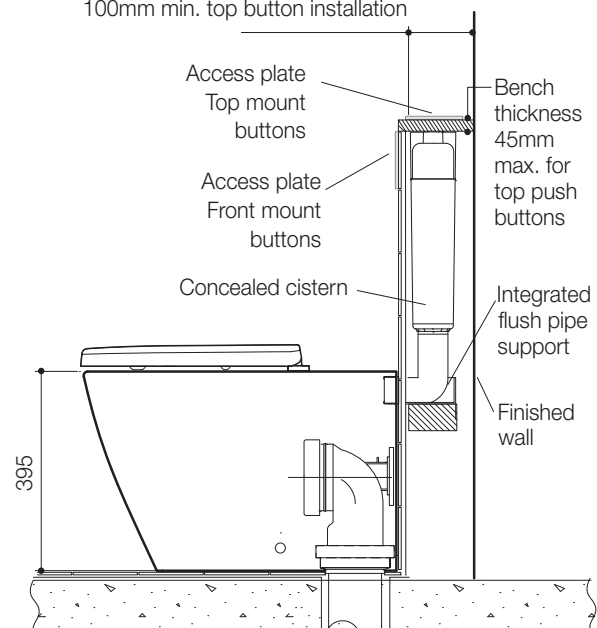

Note: access to cistern internals can be achieved through either front or top mount button plate option.


Dimensions are in mm and subject to normal manufacturing tolerances. The manufacturer reserves the right to alter specifications without notice.

**Drawing Scale 1:15**

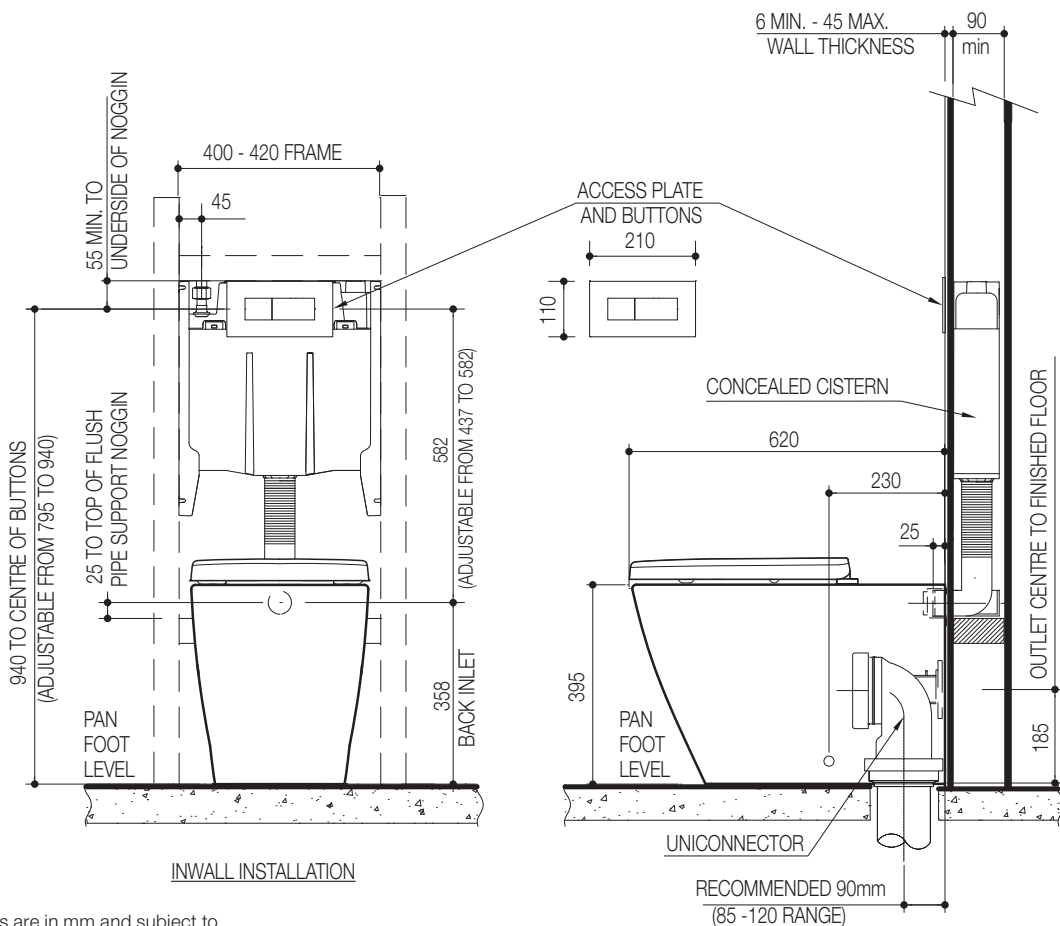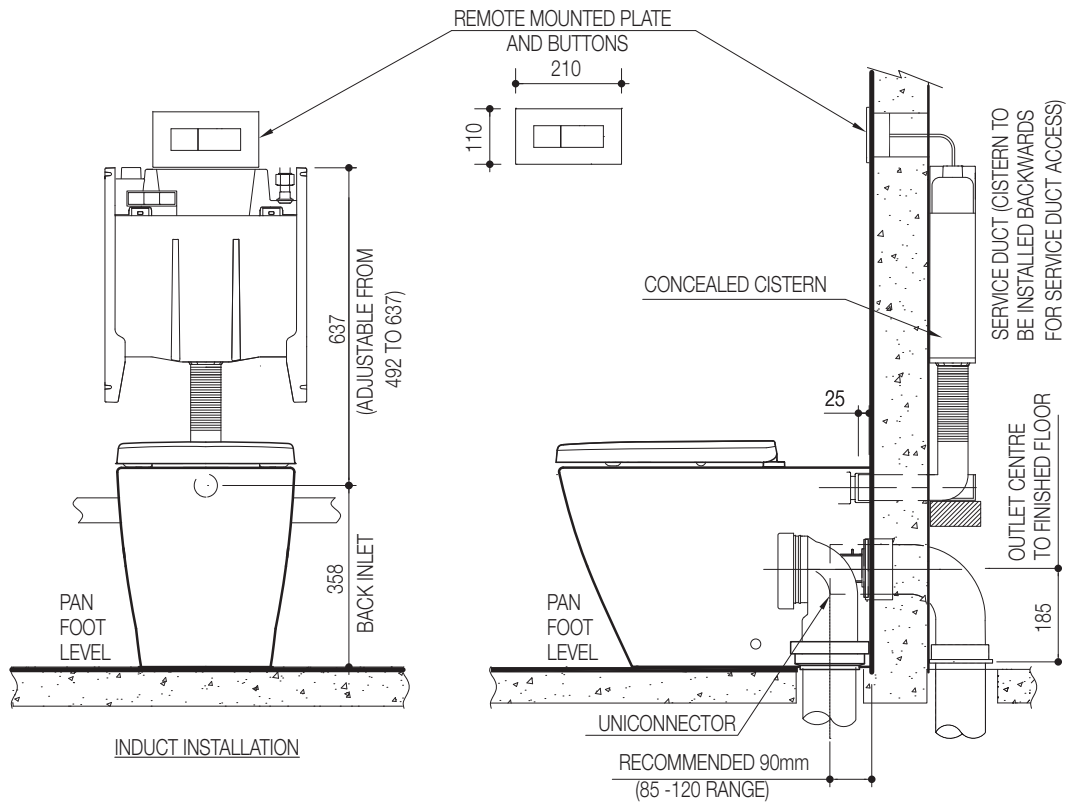

Dimensions are in mm and subject to normal manufacturing tolerances. The manufacturer reserves the right to alter specifications without notice.

**Drawing Scale 1:15**

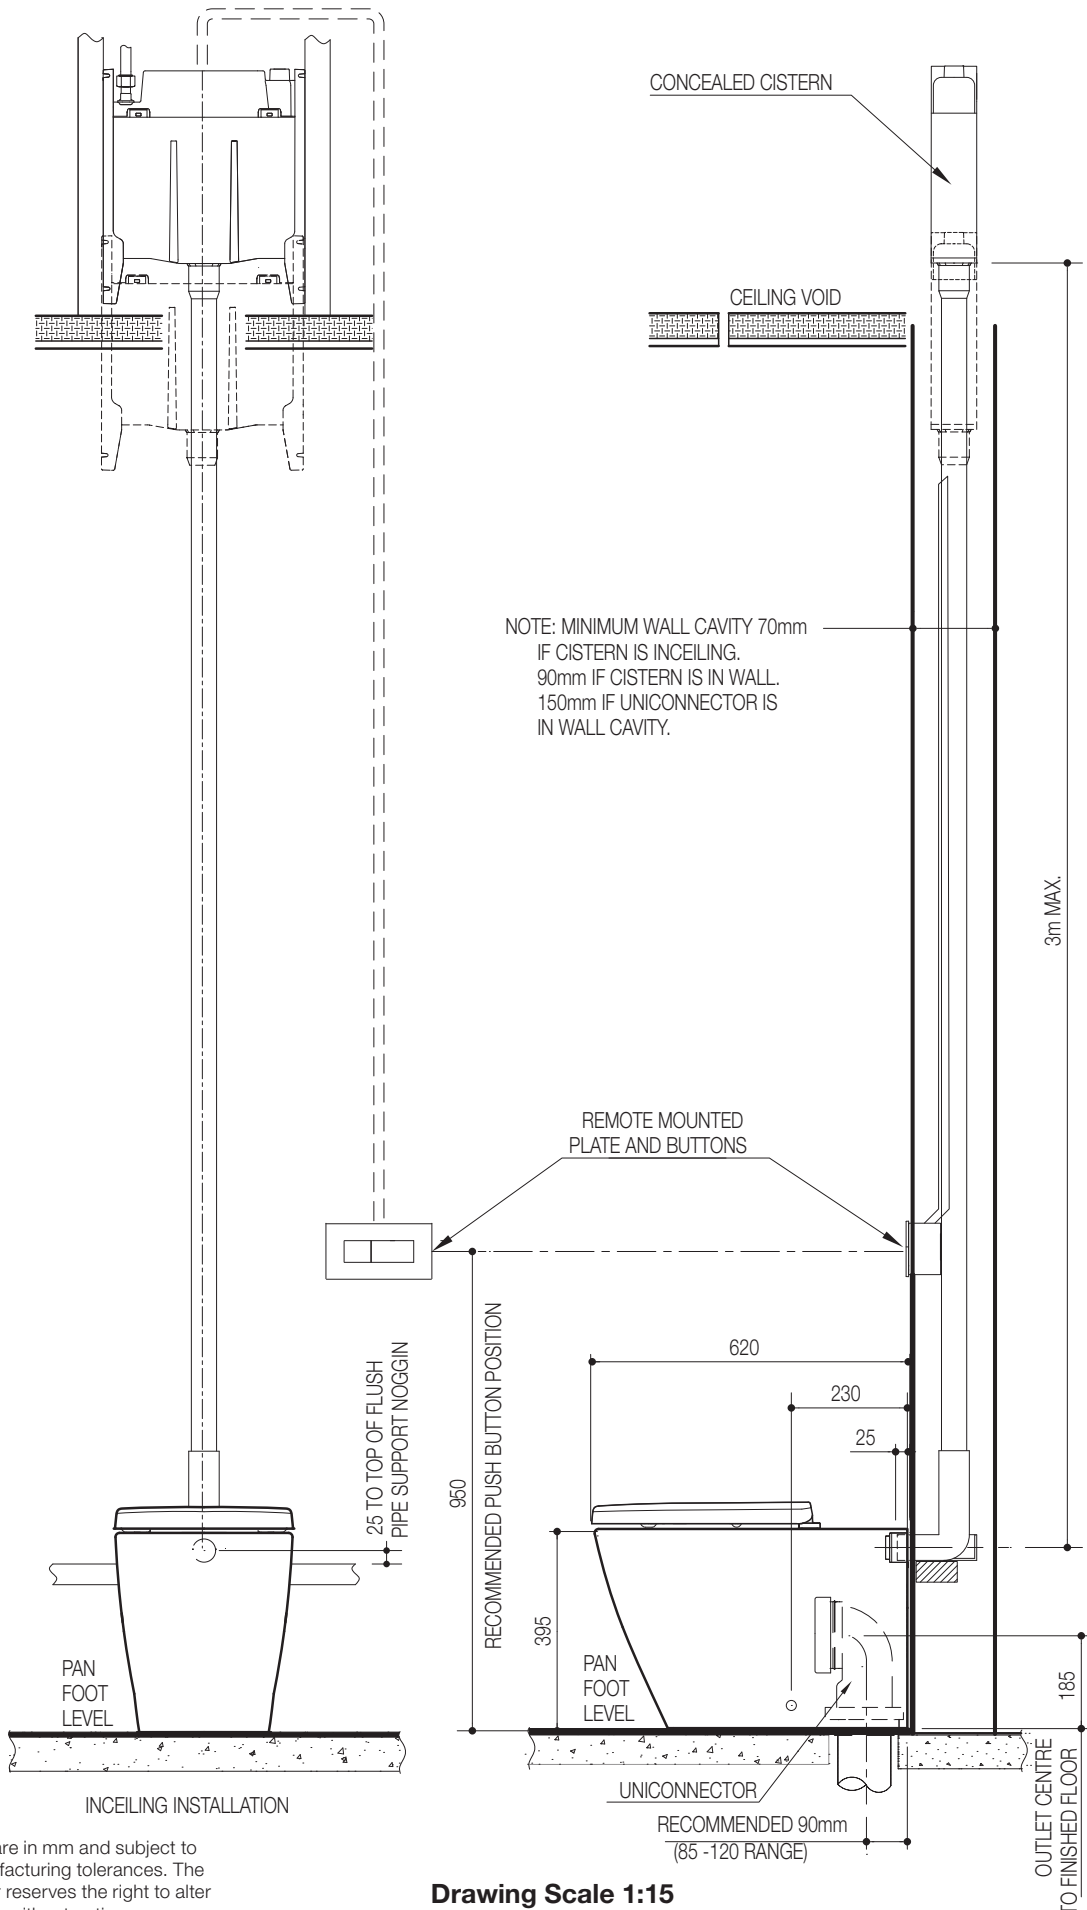

Dimensions are in mm and subject to normal manufacturing tolerances. The manufacturer reserves the right to alter specifications without notice.

**Drawing Scale 1:15**