



CAROMA

CARAVELLE CROSS - WALL TOP ASSEMBLIES

+

PLUMBERS INSTALLATION INSTRUCTIONS

Important Information

- * 3 handles are provided to indicate cold, hot & tempered water supplies. Discard the handle not required.

Installation

- 1) Check that the face of the recess tap body (1) is 0-13mm from the wall/tile face, as shown in Fig.1.
- 2) Check seats in recess tap bodies (1) are in good condition and free of foreign materials. Reseat if required.
Important : All pipework must be thoroughly flushed prior to installation, to remove all foreign matter.
- 3) Remove locknut (4), cap (3) and fibre washer from cartridge (2). Screw cartridge (2) into tap body (1). Using a suitable spanner, tighten cartridge (2) until it comes to a firm stop. (DO NOT TIGHTEN CARTRIDGE USING SPINDLE). Fit fibre washer and then locknut (4) and tighten using a suitable spanner.
- 4) Screw wall flange (6) over each installed cartridge, and tighten fully by hand against wall/tile face, taking care not to damage the decorative finish.
- 5) Fit handle assembly as follows:-
 - i) Turn both spindles to the fully closed position.
 - ii) Place retaining nut (8) over spindle (5), with slot facing flange (6).
 - iii) Place retaining clip (9) into groove at bottom of spline in spindle (5).
 - iv) Ensure handle insert (10) is in position in handle (11). Fit handle (11) to spline of spindle, position to suit then push firmly onto spindle until it bottoms internally. **Note**: Water supplies are indicated by the following handle colours.
Blue = Cold, Red = Hot, Yellow = Tempered.
Discard the handle not required.
 - v) Screw retaining nut (8) into handle and tighten with spanner (7) provided.

IMPORTANT	
<u>Pressure & Temperature Requirements.</u>	
•	Hot and cold water inlet pressures should be equal.
•	Static Inlet pressure range : 150 -1000 kPa New Regulation : 500 kPa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
•	Maximum hot water temperature : 80°C.

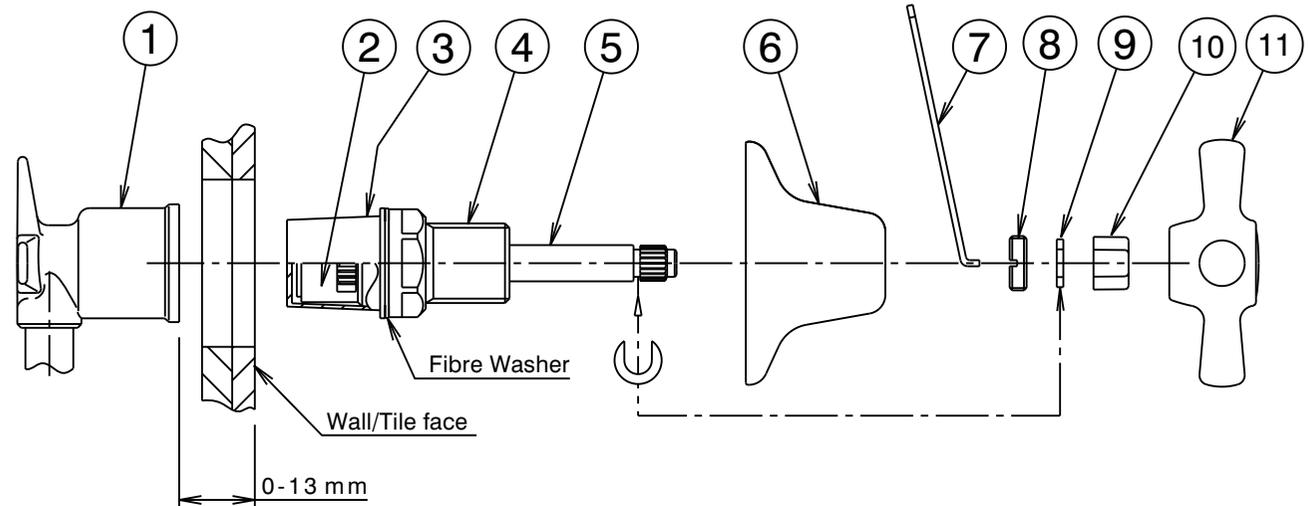


Fig. 1

+