



# COOLIBAH CLASSIC CROSS - BATH SET

+

**CAROMA**

## PLUMBERS INSTALLATION INSTRUCTIONS

### Important Information

\* All pipework must be thoroughly flushed prior to installation.

### Installation

- 1) Check that the face of the recess tap body (1) is 0-13mm from the wall/tile face, as shown in Fig.1.
- 2) Check seats in recess tap bodies (1) are in good condition and free of foreign materials. Reseat if required.  
**Important** : All pipework must be thoroughly flushed prior to installation, to remove all foreign matter.
- 3) Remove cap (2) from tap head assembly (3). Fully open tap spindle (4) in tap head assembly (3). Ensure fibre washer and jumper valve are in position as shown.
- 4) Screw tap head assembly (3) into recess tap body (1) by hand and tighten using a suitable tube spanner.
- 5) Screw wall flange (5) over each installed tap head assembly (3), and tighten fully by hand against wall/tile face, taking care not to damage the decorative finish.
- 6) Fit handle assembly as follows:-
  - i) Turn both spindles (4) to the fully closed position.
  - ii) Place retaining nut (7) over spindle (4), with slot facing flange (5).
  - iii) Place retaining clip (8) into groove at bottom of spline in spindle (4).
  - iv) Ensure handle insert (9) is in position in handle (10). Fit handle (10) to spline of spindle, position to suit then push firmly onto spindle until it bottoms internally. Screw retaining nut (7) into handle and tighten with spanner (6) provided.
- 7) Check that threaded nipple (11) is the correct length, as shown. Cut to length if required ensuring end face is square. Apply thread tape to the thread. Screw the bath outlet (12) onto the threaded nipple (11) and position as required. DO NOT OVERTIGHTEN.

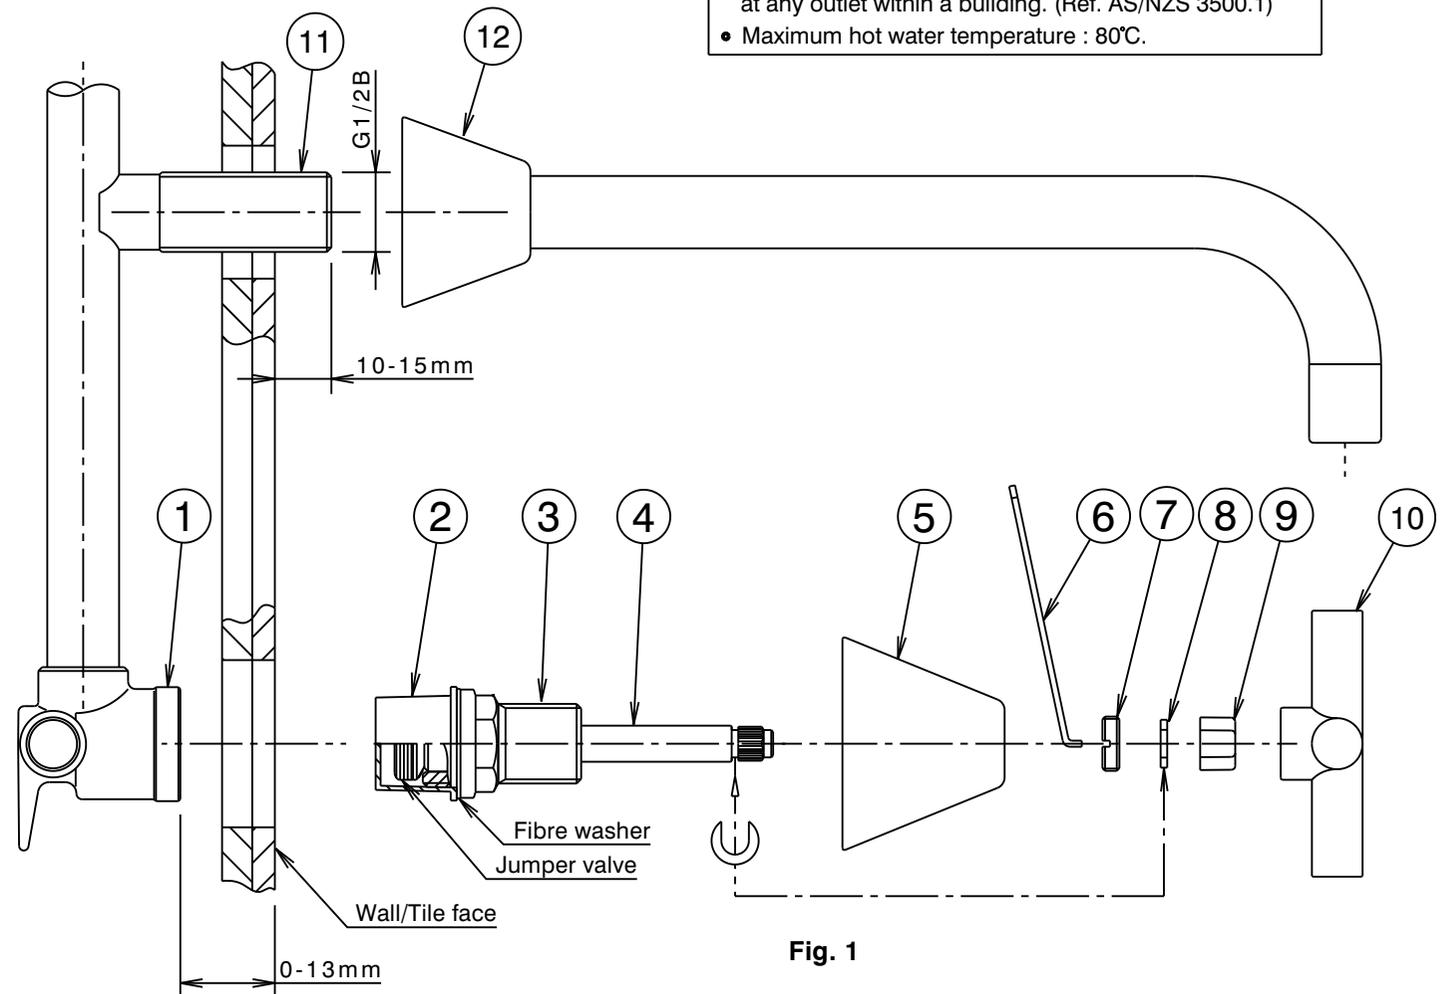


Fig. 1

### **IMPORTANT**

#### **Pressure & Temperature Requirements.**

- Hot and cold water inlet pressures should be equal.
- Static Inlet pressure range : 150 -1000 kPa  
New Regulation : 500 kPa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
- Maximum hot water temperature : 80°C.

+