

Opal 920

Ceramic Wall Basin

Basin Size: 920mm x 450mm (nominal)

Vitreous China Shroud



Left hand shelf pictured.

Tapware and shroud shown for photographic purposes only.

The Opal 920 wall basin is part of an extensive range of co-ordinated basins that allows continuity of design throughout the project where basins of matching design for different applications are required. The design offers smooth rounded contours and clean lines. Available with optional shroud, this basin is suitable for domestic, commercial and accessible applications complying to AS 1428.1-2009 Amd. 1 using standard Caroma plastic traps.*

Tap Holes: Basin available in: **Left Hand Shelf**, no tapholes Code No.632400, one taphole – centre option Code No. 632410 and three taphole option Code No.632430. **Right Hand Shelf**, no tapholes Code No.632300, one taphole – centre option Code No.632310 and three taphole option Code No.632330

Tapware - other than sole occupancy unit: All electronic and basin care mixers referred to in section 19 comply to AS1428.1-2009 Amd. 1 installations other than sole occupancy unit when matched with this basin.

Tapware - sole occupancy unit: Recommended tapware for sole occupancy unit for compliance to AS1428.1-2009 Amd. 1; **Electronic Tapware:** Designo and Designo Solar. See section 19 for further details.

Waste Outlet: Chrome grate waste and white plug supplied, suitable for a 40mm trap connection. Alternative waste options are available — Flush fitting Chrome Waste Code No. 687327C, Vandal Resistant Flush Fitting Chrome Waste Code No.687141, Covered Chrome Plug and Waste Code No.687142 and Vandal Resistant Covered Chrome Plug and Waste Code No.687143


Shroud: Optional Opal Shroud, Code No.632601 completely conceals P-trap waste pipe fittings, concealed fixing bracket supplied. 40mm Caroma short plastic P-trap is required for correct installation Code No.102115.

Note: It is essential for the installation of the shroud to the basin that clearance is provided for the shroud in the plumbing setout from water inlet pipes and connections.

Bowl Capacity: 9.5 litres.

Overflow: Overflow not available.

Colours: White only.

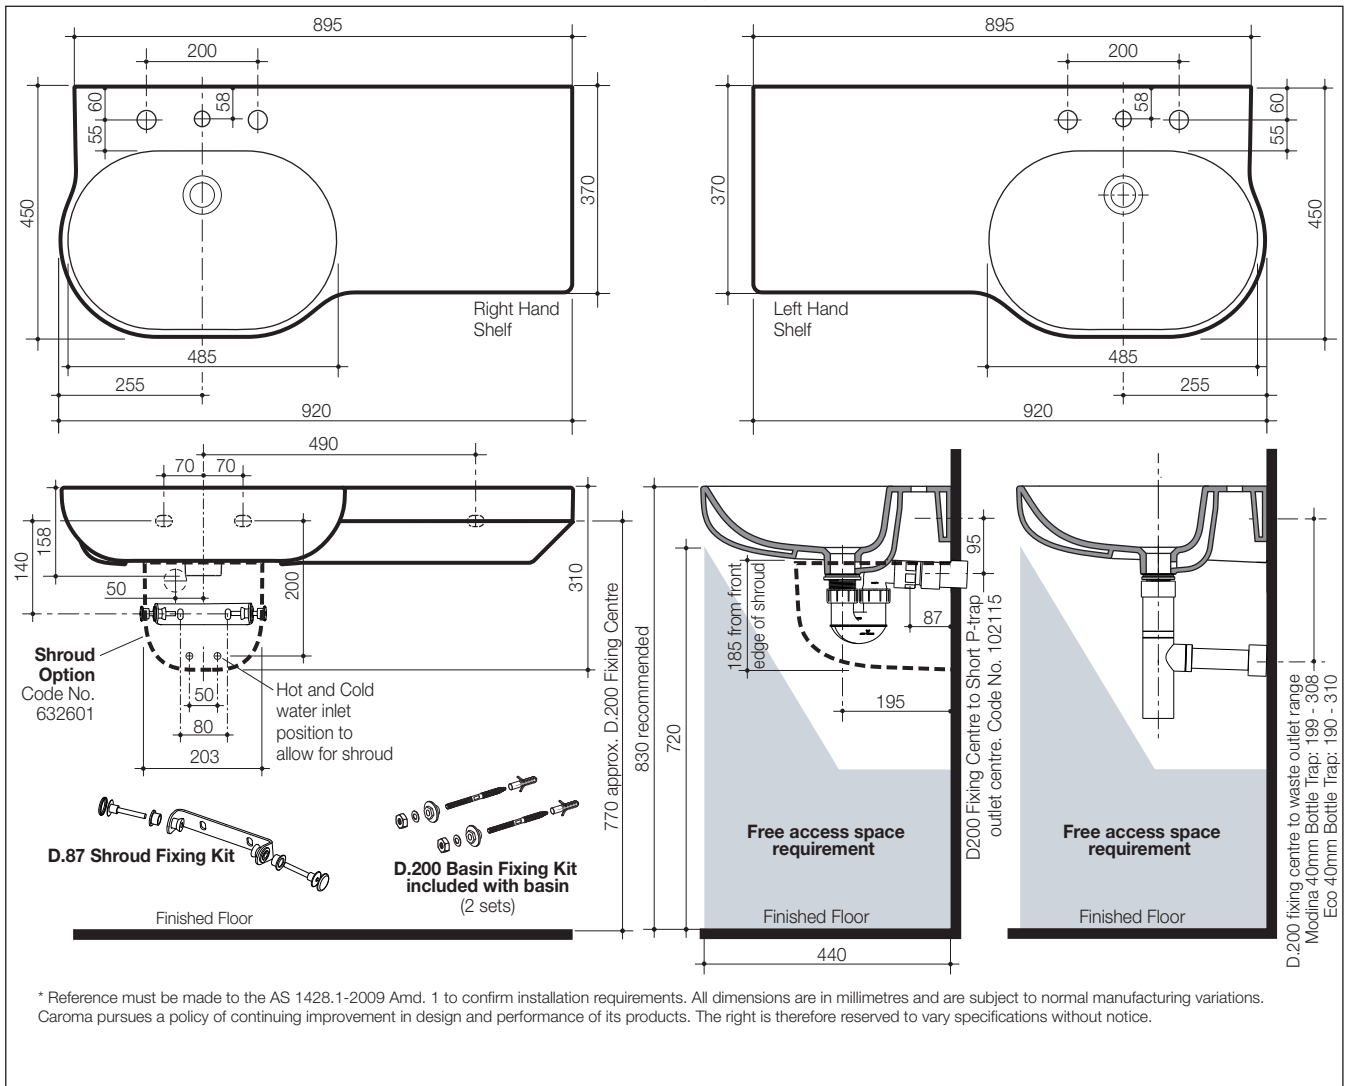

* Reference must be made to the AS 1428.1-2009 Amd. 1 to confirm installation requirements. All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.