

Opal II Single Flap Seat White


Installation Instructions

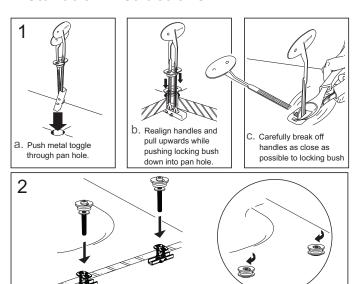


Using the larger allen key provided tighten the Fixing Screw to firmly secure in place. NOTE: The Metal Cap should still be able to rotate.



Insert Left & Right Hinge Block fully into holes in seat. Ensure the grub screw fixing hole is at the back.

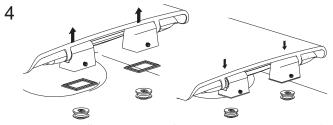

Position Hinge Buffers on the base of each Hinge Block. Lower seat & hinge block assembly onto each Metal Cap.

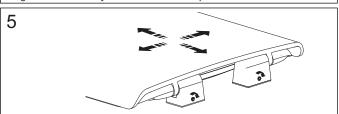

Adjust seat to desired position. Firmly tighten Grub Screw using the smaller allen key provided . Ensure the Hinge Blocks pull down firmly onto Pan

