

Liano Wall Faced Close Coupled Suite

4.5/3 litre Vitreous China Dual Flush

Wall Faced Box Rim Close-Coupled Toilet Suite

A sharp and symmetrical design for a contemporary look and feel, the **Liano** wall faced close coupled toilet suite conceals plumbing fittings for an aesthetically pleasing finish. The pan connection system includes the patented Caroma Uni-Orbital® Connector for increased installation flexibility. The Caroma Uni-Orbital® Connector extends to any position in a 50mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 205mm with a recommended setout of 140mm. The suite is targeted to commercial projects, but is also suitable for domestic applications. Fitted with chrome plated push buttons, the smooth sided pan design with the great looking thin lid, soft close seat with quick release offers a seamless finish to your bathroom.

Pan: Liano 4.5 litre full flush washdown with a fully glazed rim and trap.

Traps: Universal trap for S or P-trap installations.

Cistern: Liano Cistern – has a free fitting lid and is suitable for domestic and light commercial applications. Available with internal overflow. Standard back entry. **Vandal Resistant Conversion Kit available** - recommended for use in heavy use commercial areas. Cistern inlet stop valve and inlet connection is concealed within the cistern and is included.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant. Accurate wall setout for B.S.P. 1/2" Nipple water inlet connection is essential.

Fixing: The cistern is fixed directly to the pan with a robust concealed base fixing system without the need for wall fixing.


Seat: Includes **Liano soft close** seat.

Installation: Refer to *Important Information for Plumbers* section.

Colours: White only.



Liano Wall Faced Close Coupled Suite (continued)

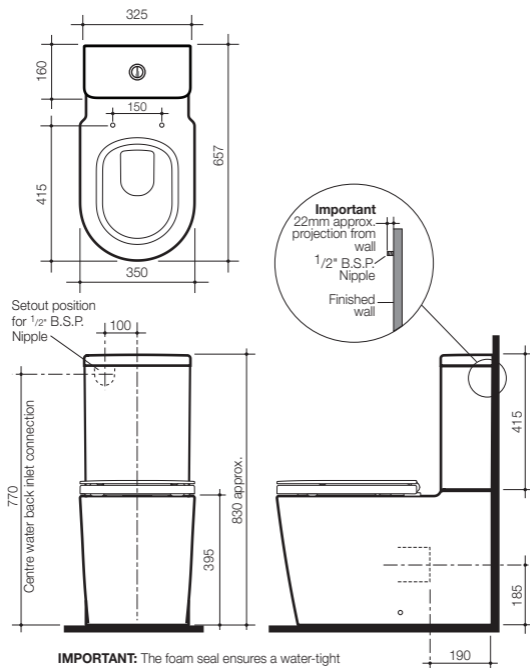

IMPORTANT: The foam seal ensures a water-tight seal for the connection of the cistern and pan.

Use only the foam seal provided.

Do not use silicone or other sealants.

